

## IXOLAR™ High Efficiency Solar Bits

### Description

IXOLAR™ Solar Bits are IXYS' product line of coated monocrystalline, high efficiency solar cell products using IXYS' XOD17 bondable solar cell dies. Solar Bits have reflow solderable surface mount packages, they are available in tape and reel packages and can be automatically pick and place mounted. There are 2 different Solar Bits available with different voltage and current output.

The IXOLAR™ Solar Bits are ideal for charging various battery powered and handheld consumer products such as mobile phones, cameras, PDAs, MP3-Players and toys. They are also suitable for industrial applications such as wireless sensors, portable instrumentation and for charging emergency backup batteries.

With a cell efficiency of typically 17%, Solar Bits give the ability to extend run time even in "low light" conditions and increase battery life and run time in a small footprint, which can be easily accommodated in the design of Portable Products. The design allows to flexibly connect Solar Bits in series and/or parallel to perfectly meet the application's power requirements.

IXOLAR™ products have a very good response over a wide wavelength range and therefore can be used in both indoor and outdoor applications.

### Product and Ordering Information


| Part Number | Open Circuit Voltage [V] | Short Circuit Current [mA] | Typ. Voltage @ P <sub>mpp</sub> [V] | Typ. Current @ P <sub>mpp</sub> [mA] |
|-------------|--------------------------|----------------------------|-------------------------------------|--------------------------------------|
| XOB17-12x1  | 0.63                     | 42.0                       | 0.51                                | 39.0                                 |
| XOB17-04x3  | 1.89                     | 12.6                       | 1.53                                | 11.7                                 |

(all parameters given are typical values)

Dimensions (L x W x H): 22 x 7 x 1.4 [mm]

Solar Bit Weight: 0.5 grams

Solar Bits are compliant to the RoHS Norm.

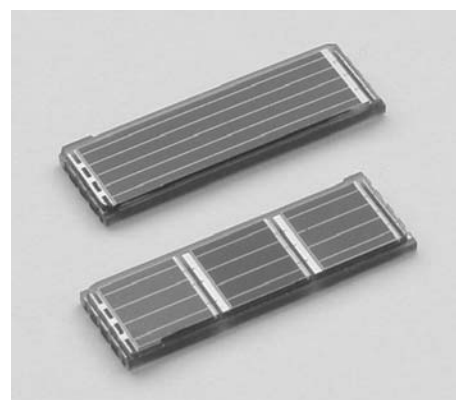

### Solar Cell Electrical Characteristics

| Symbol               | Cell Parameter                          | Typical Ratings *) | Units                  |
|----------------------|---|--------------------|------------------------|
| V <sub>oc</sub>      | open circuit voltage                    | 630                | mV                     |
| J <sub>sc</sub>      | short circuit current density           | 35                 | mA/cm <sup>2</sup>     |
| V <sub>mpp</sub>     | voltage at max. power point             | 505                | mV                     |
| J <sub>mpp</sub>     | current density at max. power point     | 32.5               | mA/cm <sup>2</sup>     |
| P <sub>mpp</sub>     | maximum peak power                      | 16.6               | mW/cm <sup>2</sup>     |
| FF                   | fill factor                             | > 75               | %                      |
| η                    | efficiency                              | 17                 | %                      |
| ΔV <sub>oc</sub> /ΔT | open circuit voltage temp. coefficient  | -2.1               | mV/K                   |
| ΔJ <sub>sc</sub> /ΔT | short circuit current temp. coefficient | 0.12               | mA/(cm <sup>2</sup> K) |

\*) All values measured at Standard Condition: 1 sun (= 1000 W/m<sup>2</sup>), Air Mass 1.5, 25°C

### Features

- Monocrystalline silicon technology
- High efficiency outdoor and indoor
- Long life and stable output
- Sealed Package
- Surface Mount Package
- Reflow Solderable
- Very high mechanical robustness






### Applications

- Battery chargers for portables such as cell phones, PDAs, GPS-Systems, ...
- "Green" electricity generation
- Power backup for UPS, Sensors, Wearables

### Advantages


- Automatic Pick & Place Mounting
- One Product for Multiple Applications
- Flexible Integration into the Application

## Typical Solar Cell Performance Data

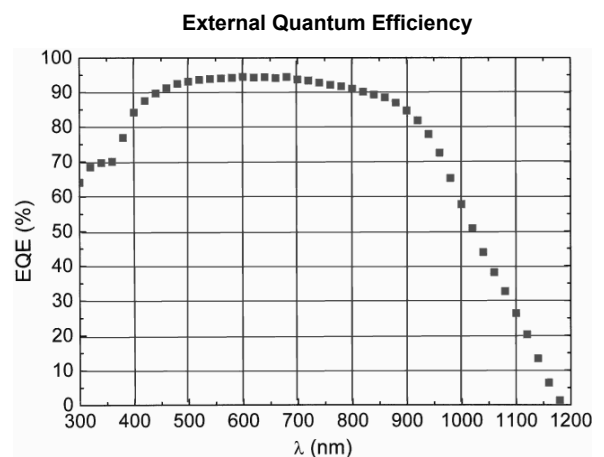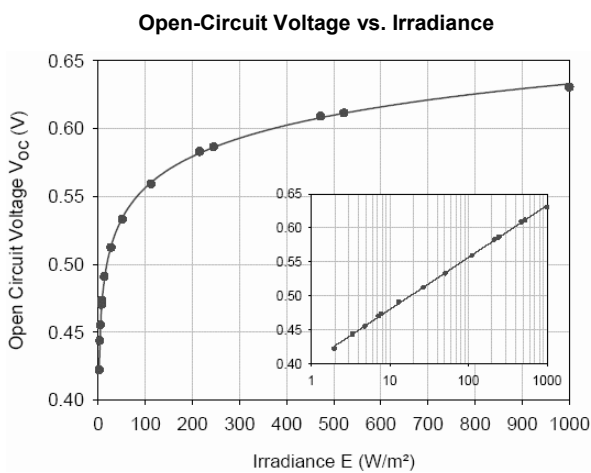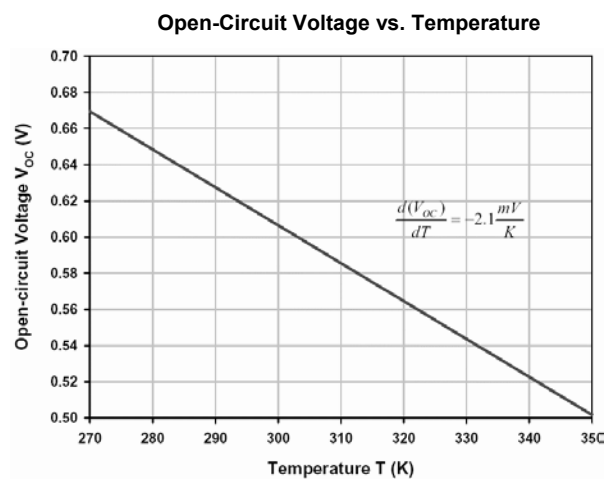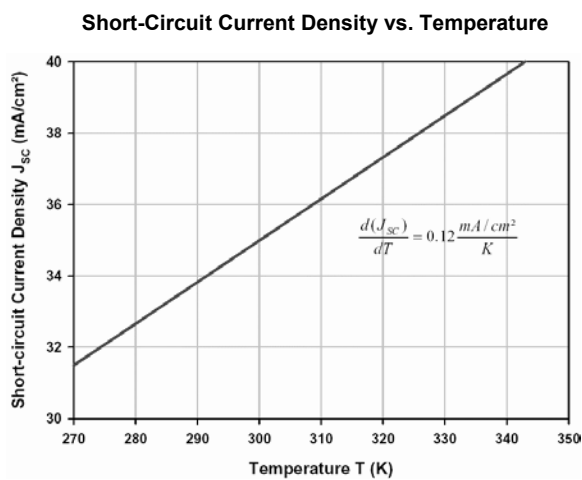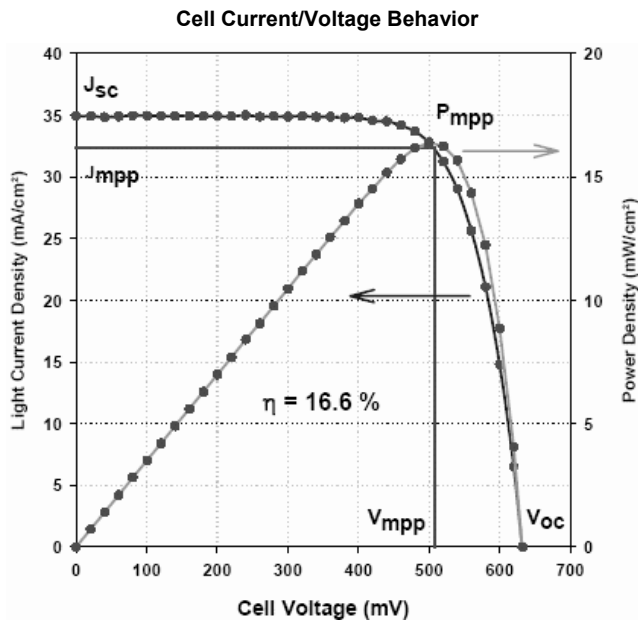


### Package front-side and back-side view


XOB17-12x1

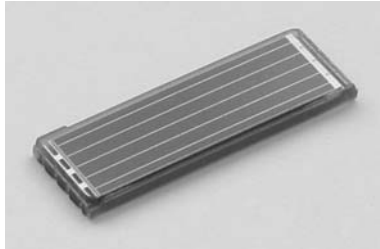

XOB17-04x3

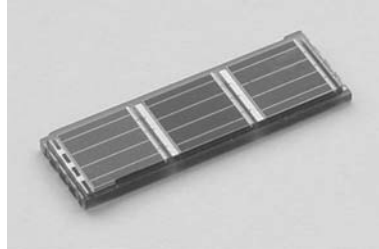

### Solar Bit Pad Design

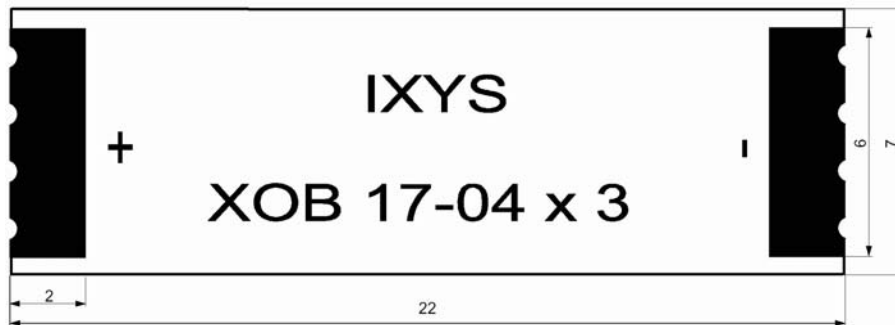

(dimensions in millimeters)

### Solar Bit PCB Layout Recommendation:

The PCB layout foot print should be equivalent to the layout of the Solar Bit but on the short ends it should be half a millimeter larger than the Solar Bit: Please use two pads of (6 x 2.5)mm size with 18mm spacing.

### Moisture Reflow Sensitivity, Soldering and Washing Information

IXYS has characterized the moisture reflow sensitivity of the Solar Bits using IPC/JEDEC standard J-STD-020. Moisture uptake from atmospheric humidity occurs by diffusion. During the solder reflow process, in which the component is attached to the PCB, the whole body of the component is exposed to high process temperatures. The combination of moisture uptake and high reflow soldering temperatures may lead to moisture induced delamination and cracking of the component. To prevent this, this component must be handled in accordance with IPC/JEDEC standard J-STD-020 per the labelled moisture sensitivity level (MSL), level 1.

IXYS does not recommend the use of chlorinated solvents.

### Tape and Reel Information

Under development. It is the intention to use a tape with 44mm standard width.

*IXYS makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses or indemnity are expressed or implied. Except as set forth in IXYS' Standard Terms and Conditions of Sale, IXYS assumes no liability whatsoever, and disclaims any express or implied warranty relating to its products, including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.*

*The products described in this document are not designed, intended, authorized, or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of IXYS' product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. IXYS reserves the right to discontinue or make changes to its products at any time without notice.*